



User Manual

ATLONA

HDMI TO MINI-DISPLAYPORT SCALER/CONVERTER AT-DP300





TABLE OF CONTENTS

1. Introduction	 3
2. Applications	 3
3. Package Contents	 3
4. Features	 4
5. Specification	 4
6. Operation Controls and Functions	 4
6.1. Front Panel	 4
6.2. Rear Panel	 5
6.3. Top Panel	 5
7. Connection and Installation	 6
8. Atlona Product Registration	 6
9. Safety Information	 7
10. Warranty	8



INTRODUCTION:

The Atlona AT-DP300 is HDMI to Mini DisplayPort Scaler/converter, designed to convert any HDMI sources such as BluRay Player, Cable Box, Video Game Console, Apple TV to Mini DisplayPort which is commonly used by Apple 24" LED, Apple 27" LED and iMac 27".

The AT-DP300 is able to accept high resolution audio/video signals up to 1080p and scale them to either 1920x1200 or 720p

Apple 24" users:

- Video IN: AT-DP300 can take all standard VESA resolutions though HDMI input: 640~480 to 1920x1200 and 480p~1080p
- Video OUT: AT-DP300 supports native resolution output 1920x1200
- Audio: Apple 24" LED only support Audio though USB cable (not though Mini DisplayPort, therefore please use 3.5mm audio out on the DP300 or digital audio on the hdmi source to go to separate set of speakers or home theater). If you decide to use Stereo Audio output on the DP300, please select audio output in the source settings to be 2channel PCM.

Apple 27" LED and iMac 27" users:

- Video IN: AT-DP300 can take all standard VESA resolutions though HDMI input: 640~480 to 1920x1200 and 480p~1080p
- Video OUT: AT-DP300 is only capable of supporting one output resolution 1280x720 (720p). The reason for it is that iMac 27"/27" LED native resolutions are: 800x600, 1280x720 or 2560x1440 (since our box is limited to single link (1920x1200), and can't work with 2560x1440 it will take the next resolution down the list which is 720p. if you want the full native resolution 2560x1440, please look at our other product AT-HD620
- Audio: Apple 27" LED and iMac 27" both support audio though Mini DisplayPort input, therefore DP300 will also embed audio from HDMI to Mini DisplayPort

Dell/HP/Lenovo/BenQ LCD users:

Note: Mini DisplayPort to DisplayPort adapter is required

- Video IN: AT-DP300 can take all standard VESA resolutions though HDMI input: 640~480 to 1920x1200 and 480p~1080p
- Video OUT: AT-DP300 supports native resolution output 1920x1200, 1680x1050 or 1280x800
- Audio: Dell/HP/Lenovo/BenQ support audio though Mini DisplayPort input, therefore DP300 will also embed audio from HDMI to Mini DisplayPort

APPLICATIONS:

- Gaming entertainment
- Video entertainment
- Advertisement display

PACKAGE CONTENTS:

- AT-DP300 HDMI to Mini DisplayPort Converter/Scaler
- 5V/1A DC power adaptor (Universal 110/220v)
- Operation manual



FEATURES:


- Support HDCP compliant
- Compatible with Apple 24" LED, Apple 27" LED and Apple iMac 27"
- Supports High Resolutions Input up to 1920x1200 or 1080p
- Supports High Resolutions Output up to 1920x1200 on Apple 24" and 720p on iMac27" and Apple 27" LED
- Supports HDMI v1.3 up to 12-bit deep color
- · Auto Scaling function, allows full communication with display and scale the

SPECIFICATIONS:

TMDS Clock Frequency	225MHz
Input Port	1 x HDMI
Output Ports	1 x Mini DisplayPort, 1 x 3.5Ø stereo audio jack
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (inch)	4.489W) x 2.55 (D) x 1.02 (H
Dimensions (mm)	114 (W) x 65 (D) x 26 (H)
Weight (LB)	0.5
Power Consumption	3.6W
Operating Temperature	0°C ~ 40°C / 32°F~104°F
Storage Temperature	-20°C ~60°C / -4°F~140°F
Relative Humidity	20~90% RH (non-condensing)

OPERATION CONTROLS AND FUCTIONS:


6.1. Front Panel

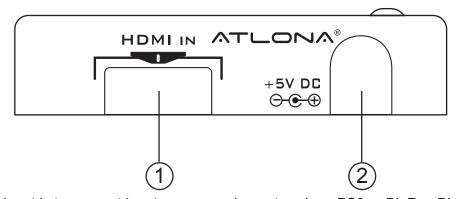

- 1. HDMI IN: This input is to connect input source equipment such as PS3 or BluRay DVD player.
- 2. DC 5V: This input is to plug 5V DC power supply




6.2. Rear Panel

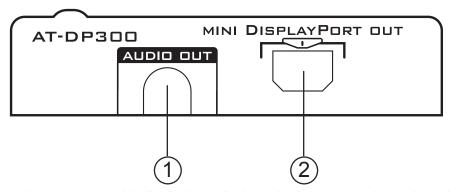

- 1. AUDIO OUT: This input is to connect with display's audio input jack or external speakers (Apple 24" LED only, explanation is above)
- 2. Mini DP OUT: This output is to connect a display

6.3. Top Panel

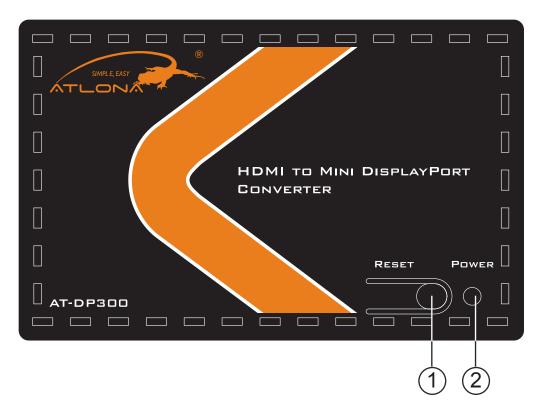

- 1. RESET button: This button is designed to reset the converter to manufactures' default. Only press it if you are not receiving any output signal.
- 2. Power LED: The Green LED will illuminate when the power is on.





ATLONA PRODUCT REGISTRATION

Thank you for purchasing this Atlona product — we hope you'll enjoy it.

We also hope that you'll take a few moments to register your new purchase. Registration creates an ownership record if your product is lost or stolen and helps ensure you'll receive notification of performance issues and firmware updates.

At Atlona, we respect and protect your privacy and assure you that your registration information is completely secure. Of course, Atlona product registration is totally voluntary and failure to register will not diminish your limited warranty rights.

To register go to www.atlona.com/registration



SAFETY INFORMATION:

Safeguards

To reduce the risk of electric shock, do not expose this product to rain or moisture.

If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.

Do not modify the wall plug. Doing so will void the warranty and safety features.

This equipment should be installed near the socket outlet and the device should be easily accessible in case it requires disconnection.

Precautions

FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Operate this product using only the included external power supply. Use of other power supplies could impair performance, damage the product or cause fires.

In the event of an electrostatic discharge, this device may automatically turn off. If this occurs, unplug the device, and plug it back in.

Protect and route power cords so they will not be stepped on or pinched by anything placed on or against them. Be especially careful of plug-ins, or cord exit points from this product. Avoid excessive humidity, sudden temperature changes or temperature extremes.

Keep this product away from wet locations such as bathtubs, sinks, laundries, wet basements and swimming pools.

Use only accessories recommended by ATLONA to avoid fire, shock or other hazards.

Unplug the product before cleaning. Use a damp cloth for cleaning. Do not use cleaning fluid or aerosols, which could enter the unit and cause damage, fire or electrical shock. Some substances may also mar the finish of the product.

Never open or remove unit panels or make any adjustments not described in this manual. Attempting to do so could expose you to dangerous electrical shock or other hazards. It may also cause damage to your AT-DP300. Opening the product will void the warranty.

Do not attempt to service the unit. Instead disconnect it and contact your Authorized ATLONA reseller or contact ATLONA directly.



WARRANTY

1. LIMITED WARRANTY

Atlona Technologies warrants that (a) its products (the "Product") will perform substantially in accordance with the accompanying written materials for a period of 3 YEARS from the date of receipt and (b) that the Product will be free from defects in materials and workmanship under normal use and service for a period of 3 years. In the event applicable law imposes any implied warranties, the implied warranty period is limited to 3 years from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply to Customer.

2. CUSTOMER REMEDIES

Atlona Technologies and its suppliers' entire liability and Customer's exclusive remedy shall be, at Atlona Technologies' option, either return of the price paid for the Product, or repair or replacement of the Product that does not meet this Limited Warranty and which is returned to Atlona Technologies with a copy of Customer's receipt. This Limited Warranty is void if failure of the Product has resulted from accident, abuse, or misapplication. Any replacement Product will be warranted for the remainder of the original warranty period or 3 year, whichever is longer.

3. NO OTHER WARRANTIES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ATLONA TECHNOLOGIES AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH REGARD TO THE PRODUCT AND ANY RELATED WRITTEN MATERIALS. THIS LIMITED WARRANTY GIVES CUSTOMER SPECIFIC LEGAL RIGHTS. CUSTOMER MAY HAVE OTHER RIGHTS DEPENDING ON THE JURISDICTION.

4. NO LIABILITY FOR DAMAGES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL ATLONA TECHNOLOGIES OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR INDIRECT DAMAGES FOR PERSONAL INJURY, LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS PRODUCT, EVEN IF ATLONA TECHNOLOGIES HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, ATLONA TECHNOLOGIES' AND ITS SUPPLIERS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.